


mityvac®

www.mityvac.com

Automotive & Vacuum-Related Tools & Equipment



Table of Contents by Product

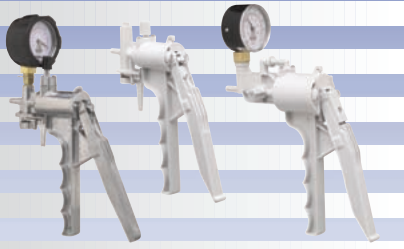

Hand Vacuum Pumps and Kits

2 - 7

Mityvac offers a selection of eight basic hand-held vacuum/pressure pump models, two Silverline and six Selectline. Each is featured in the chart on page four, and differentiated by a combination of features and options described on the previous pages. By offering such a wide selection, you can maximize the value and performance of your pump by choosing the exact features that best meet the requirements of your application.



Fluid Evacuators

8

Mityvac fluid evacuators are ideal for removing fluids from small tanks and reservoirs. These units are lightweight and portable, and include integrated reservoirs with capacities ranging from 1.9 quarts (1.8 liters) to 2.3 gallons (8.8 liters). Applications include evacuating engine oil, coolants, transaxle grease, and power steering, transmission, and brake fluid.



Brake and Clutch Bleeding Equipment

10

Mityvac offers several great options to meet your unique hydraulic brake and clutch bleeding requirements. The manual pressure bleeder, and selection of manual and compressed air-operated vacuum bleeders provide a clean, economic one-person method of removing old fluid and trapped air from hydraulic systems. Each is designed and manufactured for exceptional performance, and includes a selection of convenient and time saving accessories.



Engine Diagnostic Equipment

14

In addition to the original Mityvac automotive vacuum test kits, we offer an outstanding selection of cylinder compression and fuel system pressure test kits to meet the needs of professional service technicians worldwide.



Cooling System Equipment

20

All Mityvac cooling system test, evacuation, and refill equipment utilize our specially designed universal cooling system adapter that conveniently adapts to a wide variety of cars, trucks and SUVs. Capable of replacing numerous specialized radiator and expansion tank adapters, our flexible stepped design provides the most economical, efficient means for performing routine testing and maintenance on automotive cooling systems.



Specialty Equipment

22

Mityvac offers a selection of specialty tools and equipment designed for those unique applications where just the right product can greatly simplify an application or job.




Accessories


23

By Application

Automotive Test Adapters	25
Automotive Test Kits	5, 6
Brake Bleed Adapter	25
Brake Bleeding Accessories	11, 12, 24-26
Brake Bleeders, Vacuum	5-13
Brake Bleeders, Pressure	13
Clutch Bleeders	5-13
Compression Testers, Diesel	17, 18
Compression Testers, Gas	14-16
Cooling System Adapter	21
Cooling System Pressure Testers	21
Cooling System Purge/Refill Kit	20
Diesel Compressionn Adapters	19
Dual Adapter Bleed Kit	26
Dual Converter Kits	23
Fuel Injection Pressure Tester	14
Fuel Pump Pressure Tester	14
Fluid Dispenser	9
Fluid Evacuators	8, 9
Fluid Reservoirs	25
Fluid Transfer Kits	24
Fluid Transfer Pump	22
Gauges	23, 24
Hose Clamp	22
Maintenance Kits, Vacuum Pumps	4
Master Cylinder Refill Kits	11, 12, 24
Mat, Foam Knee	22
Universal Radiator Adapter	21
Vacuum Line Caps	26
Vacuum Pumps	4
Vacuum Pump Accessories	23-27
Vacuum Pump Kits	5-7
Vacuum/Pressure Test Gauge	14

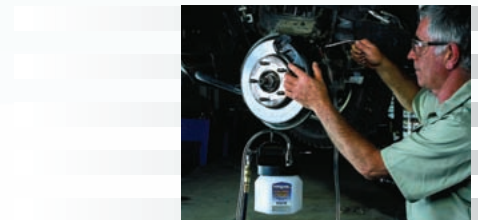

Hand Vacuum Pumps

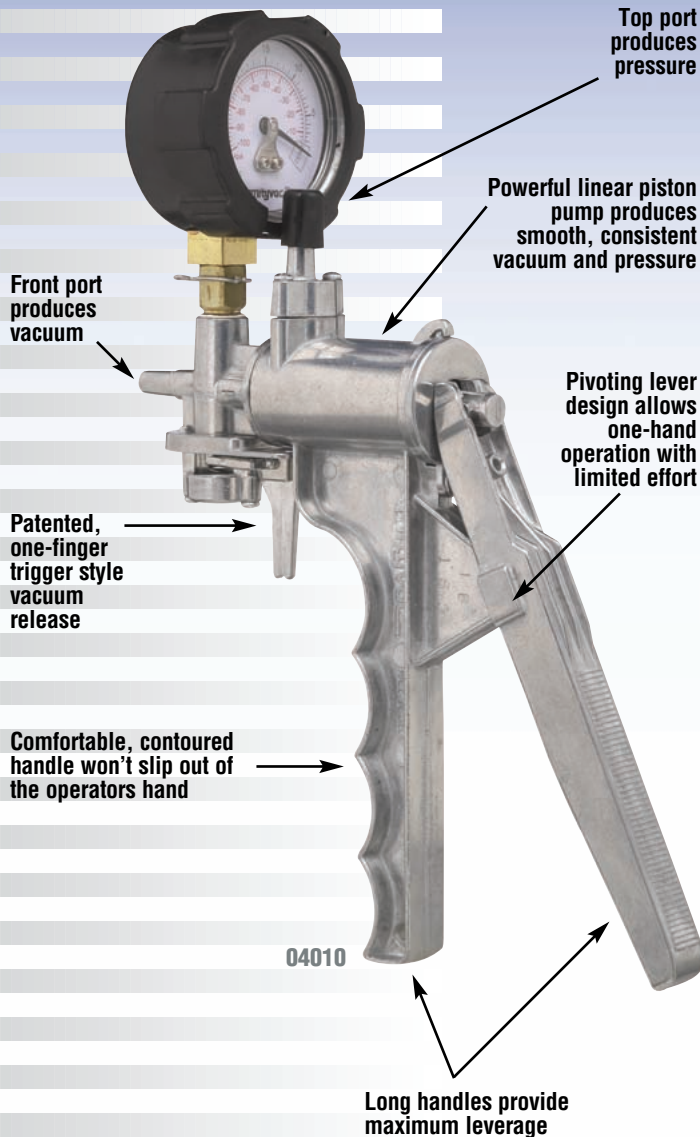

Only Lincoln offers the original Mityvac hand vacuum/pressure pumps used by automotive technicians, service and maintenance professionals, engineers, scientists and Do-It-Yourselfers worldwide. No other hand vacuum pump on the market comes close to offering the features, quality, selection and accessories at such an outstanding value. Renowned for its versatility and virtually endless list of applications, the Mityvac hand pump has been supporting working professionals with unquestioned accuracy and reliability for over 25 years. In keeping with our tradition of innovation, Mityvac continues to expand our selection of pumps, pump kits and accessories, to better suit the needs of our customers.

Pump Features

Despite their seemingly simple design, Mityvac hand pumps offer a long list of unique features, many of them patent protected, which continue to make them superior to all other hand pumps on the market. Some of these features include:

Trigger Vacuum Release—All of our standard vacuum pumps feature trigger-style vacuum release. This patented design allows the operator to quickly and conveniently relieve the vacuum in the pump and system by reaching forward with one finger and pulling back on the trigger. It's easy and the operator doesn't have to release the pump or use a second hand. Not included on dual converter pumps.

Repairable—All Mityvac Silverline and Selectline hand pumps feature a simple, repairable design. Pumps require nothing more than a screwdriver or wrench to disassemble, and standard maintenance kits and replacement parts are available for most common service items.

In-line Piston Design—Mityvac hand pumps operate using a simple linear piston design that requires very few moving parts, and builds smooth, consistent vacuum or pressure throughout the length of each stroke. The pump handles operate on the principle of leverage to create a powerful vacuum with only limited effort from the operator. A natural, one-hand squeezing action creates vacuum on the forward stroke and pressure on the return.

Vacuum and Pressure Ports—The linear piston design found on Mityvac pumps, produces both vacuum and pressure with every stroke. Only Mityvac allows you to utilize both by including a vacuum port on the front of the pump and a pressure port on the top. Although the gauge included with our standard pumps indicates only vacuum, the pressure port can be utilized to dispense fluids or provide slight pressure during gravity or pressure bleeding.

Contoured Handle—Mityvac pumps feature a contoured handle design, making them comfortable to operate and keeping them secure in the operator's hand, even when they're greasy and slick.

Mityvac

Hand Vacuum Pumps

mityvac®
www.mityvac.com

Pump Options

One of the reasons Mityvac is the world leader in vacuum pumps is due to our extensive selection of available options. By offering a wide range of pump configurations, users can select exactly the pump they need for their application without having to settle for a pump that won't perform, or pay more for options they don't use. Whether purchasing a pump for brake bleeding, engine diagnostics, windshield repair, fluid transfer or any one of hundreds of other applications, Mityvac offers the pump that fits your requirements.

Metal or PVC

Unique to the industry, Mityvac offers two outstanding lines of hand vacuum/pressure pumps, our Silverline metal pumps and our Selectline PVC pumps.

Mityvac's Silverline pumps are constructed primarily of zinc-aluminum die cast components, giving them greater durability while keeping them lightweight. This additional level of durability is required for tough working environments such as maintenance or service shops. With a little care and maintenance, Silverline pumps will provide a lifetime of flawless performance.

Mityvac Selectline hand vacuum/pressure pumps feature a body molded of tough, durable PVC. These pumps are an exceptional value because they not only offer all the features of metal pumps, but they include some very attractive advantages as well:

Lightweight—a standard PVC pump without a gauge, weighs less than five ounces!

Non-marring—PVC is ideal for use around delicate finishes or in fragile applications such as windshield repair or in laboratories

Non-corrosive—PVC is unaffected by wet, humid conditions

Chemical Resistant—PVC is naturally chemical resistant, a great advantage for use in laboratories and many industrial applications

With or Without a Gauge

Most Mityvac hand vacuum pumps are available with or without a gauge. Whether or not you should purchase a pump with a gauge depends on economics and your intended application. For the most part, applications that can be performed without a gauge, can be performed with one. Having a gauge is an added benefit on most applications, even brake bleeding, and a requirement on others. It allows continuous monitoring while applying vacuum or pressure to a system, and it's the best way to capture a peak vacuum or pressure reading during a critical diagnostic test.

All Mityvac gauges are absolutely top quality. We've stopped at nothing to offer only the best gauges. All have undergone stringent testing prior to their selection, and feature smooth diaphragm movement for superior accuracy and durability without needle bounce.

Standard or Dual Converter

Many applications for Mityvac hand pumps require pressure rather than vacuum. For example, evaporative emission sensors included on automobiles to help meet new emissions standards, must be tested for accuracy using a pressure producing hand pump. Also, performing leak tests on cooling systems requires a pressure source. To fill the needs of the modern service technicians, Mityvac Selectline and Silverline Dual Pressure/Vacuum Pumps offer a switch that allows the operator to alternate between vacuum and pressure at the front port. These pumps offer the same durability and accuracy of our standard lines, and include a compound gauge that indicates both pressure and vacuum levels.

Standard or Superpump

How much volume do you want to move? That's the question to ask when deciding between the Mityvac standard pump and Mityvac Superpump.

Our standard pump displaces 1 cu. in. (16 cc) per stroke, ideal for transferring volumes of fluid less than 1 quart (950 ml), and it provides superior control when performing diagnostics on engines and other vacuum controlled functions and equipment.


On the other hand, the Mityvac Selectline Superpump displaces twice the volume per stroke, up to 2 cu. in. (32cc), as our standard pump; making it more efficient when moving volumes greater than 1 quart (950 ml). It's ideal for larger brake bleeding applications on cars and trucks, or when dedicated to transferring or siphoning larger volumes of fluid.



Hand Vacuum Pumps

Hand Vacuum Pumps

Mityvac offers a selection of eight basic hand-held vacuum/pressure pump models, two Silverline and six Selectline. Each is featured in the chart below, and differentiated by a combination of features and options described on the previous pages. By offering such a wide selection, you can maximize the value and performance of your hand pump by choosing the exact features that best meet the requirements of your application.

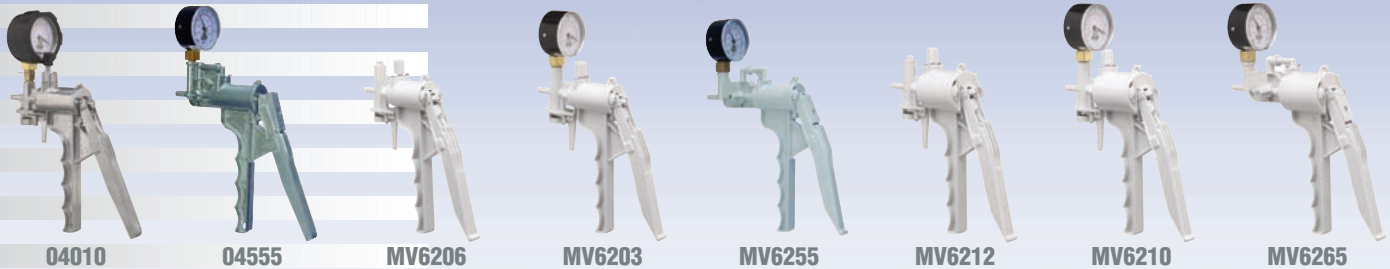

Model No.	Description	Material	Vol. per Stroke	Gauge ¹	Dual Converter ²	Weight	Max. Vacuum	Max. Pressure ³		Maintenance Kit ⁴	Replacement Gauge
								Unassisted	Assisted		
04010	Silverline Vacuum Pump, 16cc w/ gauge	Aluminum/ Zinc	1 cu. in. 16cc	Yes	No	1.5 lbs 1.0 kg	25 in Hg 85 kPa	15 psi 103 kPa	30+ psi 207+ kPa	04100	06172
04555	Silverline Vacuum Pump, 16cc, w/ gauge, DC				Yes	1.4 lbs 0.6 kg					06170
MV6206	Selectline Vacuum Pump, 16cc	Engineered Resin	1 cu. in. 16cc	No	No	4.9 oz 140 g		12 psi 82 kPa	25 psi 172 kPa	06100	N/A
MV6203	Selectline Vacuum Pump, 16cc w/ gauge				Yes	8.8 oz 250 g					06171
MV6255	Selectline Vacuum Pump 16cc w/ gauge, DC				Yes	9.1 oz 258 g					06170
MV6212	Superpump Vacuum Pump, 32cc	Engineered Resin	2 cu. in. 32cc	No	No	5.2 oz 147 g		7 psi 48 kPa	16 psi 110 kPa	MVM5100	N/A
MV6210	Superpump Vacuum Pump, 32cc w/ gauge				Yes	9.5 oz 269 g					06171
MV6265	Superpump Vacuum Pump, 32cc, w/ gauge, DC				Yes	9.4 oz 266 g					06170

¹ Mityvac vacuum gauges are scaled 0 - 30 inches of Mercury (0 - 100 kPa). Compound gauges included on dual vacuum/pressure converter pumps are scaled 0 - 30 psi (0 - 200 kPa) pressure, and 0 - 30 inches of Mercury (0 - 100 kPa) vacuum.

² All Mityvac pumps produce vacuum and pressure, and include ports for accessing both. However, only dual vacuum/pressure converter pumps allow switching between vacuum and pressure at the front port, and include a compound gauge for indicating levels of both.

³ Mityvac pumps produce pressure on the spring actuated return stroke. "Unassisted" pressure is the resultant pressure produced by the spring return force. When an operator presses on the back of the handle during the return stroke, this is referred to as "Assisted" pressure.

⁴ Maintenance kits include components necessary to perform routine maintenance on Mityvac pumps.

* Refer to the Mityvac pump introduction (pages 2 and 3) for information on features and options indicated above.

** All Mityvac pump vacuum and pressure ports fit standard 1/4" (6.4 mm) ID tubing.

*** Models listed above are individually packaged. Bulk packaging is available with special pricing on purchases of 100 units or greater. Contact your Lincoln sales or customer service representative for details.

For accessories, see pages 16 - 20.



Mityvac[®]

Hand Vacuum Pump Kits

www.mityvac.com

Mityvac pump kits combine our hand vacuum/pressure pumps with accessories carefully selected to provide the most comprehensive kits available for automotive servicing. Mityvac offers kits for simple, clean and quick one-person brake bleeding, as well as more extensive kits for testing and diagnosing hundreds of automotive related functions. With our Selectline, Silverline and Silverline Plus automotive kits, you can test and diagnose:

- Turbocharger solenoids
- Emission control systems
- EGR valves
- Vacuum gauges
- Diesel piston pin retainer leaks
- Mechanical fuel pumps
- Diesel valves
- Air/Fuel mixtures
- Turbocharger wastegates
- Ignition timing
- Distributor vacuum advance/retard mechanisms
- Carburetor adjustments & service
- Carburetor chokes
- Air conditioner/heating controls
- Vacuum actuated accessories
- Valve stem oil seals
- Mechanical & electrical vacuum pumps
- Power brakes
- Computerized engine control systems
- Automatic transmissions

Silverline Pumps

04000 Silverline Automotive Kit

Mityvac's Silverline hand vacuum/pressure pumps and kits are designed for the service professional. The 04000 kit features our durable aluminum die cast pump, and includes accessories carefully selected for maximum versatility. All components come packed in a tough custom-molded case.

Kit Includes:

- Mityvac Silverline hand vacuum/pressure pump (Model No. 04010) with 2" (50 mm) diameter gauge and rubber boot protector
- 4.5 oz (135 ml) fluid reservoir bottle with fluid transfer and storage lids
- 7 Tapered adapters for connecting to tubing from .090" to .50" ID (2.3 mm to 13 mm ID)
- 2 Tapered manifold plugs
- 3 Bleed screw adapters
- 2 1/4" ID x 24" long (6.4 mm ID x 610 mm long) connection tube
- 5/32" ID x 1/4" ID (4 mm ID x 6.4 mm ID) tubing adapter
- 1/4" ID x 1 1/2" long (6.4 mm ID x 40 mm long) connection tube
- 5/32" ID x 3" long (4 mm ID x 75 mm long) connection tube
- 1/4" ID x 3 5/8" long (6.4 mm ID x 90 mm long) connection tube
- Rubber cupped adapter • Custom-molded case • User manual (English/French/Spanish/German)

Specifications:

Packaged Weight:	3.3 lbs (1.5 kg)
Packaged Size:	12" x 8" x 3 3/8" (305 mm x 205 mm x 85 mm)

04050 Silverline Plus Automotive Kit

The Silverline Plus is our top of the line kit. It includes the Mityvac patented, exclusive dual pressure/vacuum converter pump with compound gauge, which quickly changes from vacuum to pressure at the turn of a switch. A must-have for any service professional, this pump and accessories cover all vacuum and pressure related automotive diagnostics.

Kit Includes:

- Mityvac Silverline dual vacuum/pressure converter pump (Model No. 04555) with 2" (50 mm) diameter compound gauge
- 4.5 oz (135 ml) fluid reservoir bottle with fluid transfer and storage lids
- 12 Vacuum cap plugs
- 7 Tapered adapters for connecting to tubing from .090" to .50" ID (2.3 mm to 13 mm ID)
- 2 Tapered manifold plugs
- 3 Bleed screw adapters
- 2 1/4" ID x 24" long (6.4 mm ID x 610 mm long) connection tube
- 5/32" ID x 1/4" ID (4 mm ID x 6.4 mm ID) tubing adapter
- 1/4" ID x 1 1/2" long (6.4 mm ID x 40 mm long) connection tube
- 5/32" ID x 3" long (4 mm ID x 75 mm long) connection tube
- 1/4" ID x 3 5/8" long (6.4 mm ID x 90 mm long) connection tube
- Master Cylinder Refill Kit (Model No. MVA6825)
- Rubber cupped adapter • Custom-molded case • User manual (English/French/Spanish/German)

Specifications:

Packaged Weight:	3.9 lbs (1.8 kg)
Packaged Size:	12" x 8" x 3 3/8" (305 mm x 205 mm x 85 mm)



04000



04050

Hand Vacuum Pump Kits



07000



Mityvac Pumps

07000 Automotive Tune-up and Brake Bleeding Kit

This is the original Mityvac hand vacuum/pressure pump kit used by service professionals worldwide for performing hundreds of automotive diagnostic and mechanical tests and for one-person brake bleeding. The 07000 kit contains our most popular Selectline hand vacuum/pressure pump with vacuum gauge and accessories.

Kit Includes:

- Selectline hand vacuum/pressure pump (Model No. MV6203) with 2" (50 mm) diameter gauge
- 4.5 oz (135 ml) fluid reservoir bottle with fluid transfer and storage lids
- 7 Tapered adapters for connecting to tubing from .090" to .50" (2.3 mm to 13 mm) ID
- 2 Tapered manifold plugs
- 3 Bleed screw adapters
- 2 1/4" ID x 24" long (6.4 mm ID x 610 mm long) connection tube
- 5/32" ID x 1/4" ID (4 mm ID x 6.4 mm ID) tubing adapter
- 1/4" ID x 1 1/2" long (6.4 mm ID x 40 mm long) connection tube
- 5/32" ID x 3" long (4 mm ID x 75 mm long) connection tube
- 1/4" ID x 3 5/8" long (6.4 mm ID x 90 mm long) connection tube
- Rubber cupped adapter
- User manual (English/French/Spanish/German)

Specifications:

Packaged Weight:	1.2 lbs (0.54 kg)
Packaged Size:	12" x 10" x 1 1/4" (305 mm x 250 mm x 32 mm)
Pump Displacement:	1 cu. in. (16 cc) per stroke
Max. Vacuum:	25 in. Hg (85 kPa)
Max. Pressure:	25 psi (172 kPa)
Gauge Indication:	0 - 30 in. Hg (0 - 100 kPa)



06820

06820 Brake Bleeding Kit

Includes the original Selectline hand vacuum/pressure pump and all accessories necessary to perform one-person brake bleeding on automobiles, motorcycles, ATVs, snowmobiles, etc. Also works great for siphoning or transferring fluids from tanks and reservoirs.

Kit Includes:

- Selectline hand vacuum/pressure pump (Model No. MV6206)
- 4.5 oz (135 ml) fluid reservoir bottle with fluid transfer and storage lids
- 3 Tapered adapters for connecting to tubing from 0.09" to 0.2" ID (2.3 mm to 5 mm ID)
- 3 Bleed screw adapters
- 5/32" ID x 1/4" (4 mm ID x 6.4 mm) tubing adapter
- 1/4" ID x 1 1/2" long (6.4 mm ID x 40 mm long) connection tube
- 5/32" ID x 3" long (4 mm ID x 75 mm long) connection tube
- 1/4" ID x 3 5/8" long (6.4 mm ID x 90 mm long) connection tube
- 1/4" ID x 24" long (6.4 mm ID x 610 mm long) connection tube
- User manual (English/French/Spanish/German)

Specifications:

Packaged Weight:	12.8 oz (360 g)
Packaged Size:	10 1/4" x 7 1/2" x 2 1/4" (260 mm x 190 mm x 57 mm)
Pump Displacement:	1 cu. in. (16 cc) per stroke
Max. Vacuum:	25 in. Hg (85 kPa)
Max. Pressure:	25 psi (172 kPa)

Hand Vacuum Pump Kits

MV6815 Superpump Brake Bleeding Kit

Cut your brake and clutch bleeding time in half! This outstanding bleed kit features our one-of-a-kind Mityvac Superpump, capable of displacing over twice the volume per stroke of any other hand vacuum pump on the market. In addition, the kit includes our extra large 16 oz (475 ml) fluid reservoir with hanging hook and Mityvac's new universal bleed screw adapter.

Kit includes:

- Mityvac Superpump hand vacuum/pressure pump (Model No. MV6212)
- 16 oz (475 ml) fluid reservoir with fluid transfer and storage lids
- 2 Universal bleed screw adapters
- 2 Tapered bleed screw adapters
- (2) 1/4" ID x 24" long (6.4 mm ID x 610 mm long) connection tubes
- Reservoir hanging hook
- 1/4" ID x 6" long (6.4 mm ID x 150 mm long) fluid pick-up tube
- User manual (English/French/Spanish/German)

Specifications:

Packaged Weight:	1.2 lbs (0.54 kg)
Packaged Size:	10 1/4" x 7 1/2" x 3" (260 mm x 190 mm x 75 mm)
Pump Displacement:	2 cu. in. (32 cc) per stroke
Max. Vacuum:	25 in. Hg (85 kPa)
Max. Pressure:	16 psi (110 kPa)



MV6815

MV6817 Superpump Brake Bleeding Kit with Auto Refill

This kit is the same as Model MV6815 but also includes the Mityvac MVA6825 master cylinder refill system.

Kit includes:

- Mityvac Superpump hand vacuum/pressure pump (Model No. MV6212)
- 16 oz (475 ml) fluid reservoir with fluid transfer and storage lids
- 2 Universal bleed screw adapters
- 2 Tapered bleed screw adapters
- (2) 1/4" ID x 24" long (6.4 mm ID x 610 mm long) connection tubes
- Reservoir hanging hook
- 1/4" ID x 6" long (6.4 mm ID x 150 mm long) fluid pick-up tube
- User manual (English/French/Spanish/German)

Specifications:

Packaged Weight:	1.5 lbs (0.68 kg)
Packaged Size:	10 1/4" x 7 1/2" x 3" (260 mm x 190 mm x 75 mm)
Pump Displacement:	2 cu. in. (32 cc) per stroke
Max. Vacuum:	25 in. Hg (85 kPa)
Max. Pressure:	16 psi (110 kPa)



MV6817



Includes MVA6825 Master Cylinder Refill System

Fluid Evacuation Equipment



MV7430

Fluid Evacuators

Mityvac fluid evacuators are ideal for removing fluids from small tanks and reservoirs. These units are lightweight and portable and include integrated reservoirs with capacities ranging from 1.9 quarts (1.8 liters) to 2.3 gallons (8.8 liters). Applications include evacuating engine oil, coolants, transaxle grease and power steering, transmission and brake fluid from automobiles, motorcycles, small engines, boat motors, RVs, ATVs and machinery.

MV7430 Mini Fluid Evacuator

Operates on compressed air to create a powerful venturi vacuum for quickly evacuating small reservoirs. The lid unthreads for convenient emptying, and the evacuation hose is perfect for getting into those hard-to-reach places.

Features:

- Compressed air operation
- Integrated 1.9 quart (1.8 liter) capacity reservoir
- Variable control thumb throttle
- Swivel air inlet
- Quiet, muffled exhaust
- Automatic overflow prevention

Includes:

- Fluid evacuator
- 4 ft (1.2 m) fluid evacuation hose
- Molded base w/ screws for bench mounting
- Hanging hook
- User manual (English/French/Spanish/German)

Specifications:

Reservoir Capacity:	1.9 quarts (1.8 liters)
Working Pressure:	60 – 150 psi (4.1 – 10.3 bar)
Vacuum @ 90 psi (6.2 bar):	26 in. Hg (88 kPa)
Air Consumption @ 90 psi (6.2 bar):	4.3 cfm (2.0 l/s)
Flow Rate @ 60 psi (4.1 bar):	50 oz/min (1460 ml/min)
@ 90 psi (6.2 bar):	70 oz/min (2100 ml/min)
@ 150 psi (10.3 bar):	70 oz/min (2100 ml/min)
Inlet Thread Size:	1/4" NPT
Packaged Weight:	4.8 lbs (2.2 kg)
Size:	9" tall x 6.5" dia. (230 mm tall x 150 mm dia.)

07300 PneumatiVac

Operates on compressed air to create a powerful venturi vacuum for draining fluids from tanks and reservoirs. Compressed air hose attaches at base for stability. Includes accessories for draining engine oil or transmission fluid directly through the dipstick tubes. Also includes brake/clutch bleeding kit (Model No. 07205) for vacuum bleeding hydraulic brake and clutch systems.

Features:

- Operates on compressed air
- Integrated 2.3 gallon (8.8 liter) capacity reservoir
- Large base with foot stabilizer
- Durable, chemical-resistant polyethylene construction
- Independent air shut-off valve
- Quiet, muffled exhaust
- Automatic overflow prevention
- Quick-drain pour spout

Includes:

- Fluid evacuator
- 0.23" OD x 5' long (5.7 mm OD x 1.5 m long) dipstick tube
- 0.26" OD x 5' long (6.6 mm OD x 1.5 m long) dipstick tube
- 0.41" OD x 5' long (10 mm OD x 1.5 m long) main evacuation tube
- Brake/clutch bleeding adapter kit (Model No. 07205)
- Tube adapters
- User manual (English/French/Spanish)



07300

Specifications:

Reservoir Capacity:	2.3 gallons (8.8 liters)
Max. Operating Temperature:	175°F (80°C)
Compressed Air Inlet Size:	1/4" NPT
Packaged Weight:	7.5 lbs (3.4 kg)
Size:	24" tall x 12.4" wide x 9.3" deep (610 mm tall x 315 mm wide x 235 mm deep)

Fluid Evacuation Equipment

07400 Fluid Evacuator

Vacuum is created quickly and efficiently by manual pump operation, offering superior mobility by eliminating the need for electricity or compressed air. The 07400 is ideal for draining fluids from reservoirs on boats, RVs, ATVs, snowmobiles, farm equipment or motorcycles. Includes accessories for draining engine oil or transmission fluid directly through the dipstick tubes.

Features:

- Convenient manual pump operation
- Integrated 1.9 gallon (7.3 liter) capacity reservoir
- Large base w/ foot stabilizer
- Durable, chemical-resistant polyethylene construction
- Automatic overflow prevention
- Quick-drain pour spout

Includes:

- Fluid evacuator
- 0.23" OD x 5' long (5.7 mm OD x 1.5 m long) dipstick tube
- 0.26" OD x 5' long (6.6 mm OD x 1.5 m long) dipstick tube
- 0.41" OD x 5' long (10 mm OD x 1.5 m long) main evacuation tube
- Tube adapters
- User manual (English/French/Spanish)

Specifications:

Reservoir Capacity:	1.9 gallons (7.3 liters)
Max. Operating Temperature:	175°F (80°C)
Packaged Weight:	7.5 lbs (3.4 kg)
Size:	25" tall x 7.5" dia. (635 mm tall x 190 mm dia.)



07201 Fluid Evacuator Plus

At the push of a button, this versatile unit changes from vacuum to pressure for evacuating or dispensing fluids. This functionality makes it ideal for draining tanks or reservoirs then pumping the used fluid back out for easy disposal. Multiple units work great—simply evacuate used fluids with one unit and then quickly refill with new fluid from a second. For superior mobility, the 07201 utilizes a manual pump, so compressed air or electricity is not required. Accessories are included for draining engine oil or transmission fluid directly through the dipstick tubes.

Features:

- Evacuates or dispenses at the push of a button
- Convenient manual pump operation
- Integrated 2.3 gallon (8.8 liter) capacity reservoir
- Large base with foot stabilizer
- Durable, chemical-resistant polyethylene construction
- Automatic overflow prevention
- Quick-drain pour spout

Includes:

- Fluid evacuator/dispenser
- 0.23" OD x 5' long (5.7 mm OD x 1.5 m long) dipstick tube
- 0.26" OD x 5' long (6.6 mm OD x 1.5 m long) dipstick tube
- 0.41" OD x 5' long (10 mm OD x 1.5 m long) main evacuation tube
- Tube adapters
- User manual (English/French/Spanish)


Specifications:

Reservoir Capacity:	2.3 gallons (8.8 liters)
Max. Operating Temperature:	175°F (80°C)
Packaged Weight:	10.0 lbs (4.5 kg)
Size:	24" tall x 12.4" wide x 9.3" deep (610 mm tall x 315 mm wide x 235 mm deep)



Accessories (see page 27 for a complete description)

MVA6006 Extended Tube Kit



07205 Brake Bleed Conversion Kit



Brake & Clutch Bleeding Equipment

Brake and Clutch Bleeding Equipment

Mityvac offers several great options to meet your unique hydraulic brake and clutch bleeding requirements. Our manual pressure bleeder and selection of manual and compressed air-operated vacuum bleeders provide a clean, economic one-person method of removing old fluid and trapped air from hydraulic systems. Each is designed and manufactured for exceptional performance, and includes a selection of convenient, time-saving accessories.

MV6838 Master Vacuum Brake Bleed Kit

Mityvac model MV6838 is the most complete vacuum brake bleeding and master cylinder refill kit available. It features our powerful MV6830 vacuum brake bleeder combined with both our MVA6836 master cylinder auto-refill kit. Everything is provided to quickly and conveniently vacuum bleed virtually every make and model of vehicle on the road.

Features:

- Compressed air operation
- Integrated 1.9 quart (1.8 liter) capacity fluid collection reservoir
- Variable control thumb throttle
- Swivel air inlet with quick-disconnect
- Automatically maintains fluid level in master cylinder
- Two refill kit styles ensure a fit to all makes and models of vehicles

Includes:

- Brake bleeder
- 6' (1.8 m) bleed hose assembly
- 4' (1.2 m) fluid evacuation hose
- Molded base with screws for bench mounting
- Hanging hook
- 3 Universal bleed screw adapters
- Master Auto-refill Kit (MVA6836)
- User manual (English/French/Spanish/German)

Specifications:

Bleeder Reservoir Capacity:	1.9 quarts (1.8 liters)
Refill Reservoir Capacity:	40 oz (1.2 liters)
Working Pressure:	60 – 150 psi (4.1 – 10.3 bar)
Vacuum @ 90 psi (6.2 bar):	26 in. Hg (88 kPa)
Air Consumption @ 90 psi (6.2 bar):	4.3 cfm (2.0 l/s)
Flow Rate @ 60 psi (4.1 bar):	50 oz/min (1460 ml/min)
@ 90 psi (6.2 bar):	70 oz/min (2100 ml/min)
@ 150 psi (10.3 bar):	70 oz/min (2100 ml/min)
Inlet Thread Size:	¼" NPT
Packaged Weight:	6.73 lbs (3.05 kg)
Size:	15.5" wide x 10.8" tall x 8.8" deep (395 mm wide x 275 mm tall x 225 mm deep)

MV6835 Vacuum Brake Bleed Kit

Model MV6835 extends the capabilities of our MV6830 vacuum brake bleeder by including our MVA6832 Clamp-on Auto-refill Kit. While the bleeder can evacuate up to 2 quarts (2 liters) per minute, the refill kit ensures the master cylinder does not run dry of new fluid, making this kit an extremely efficient method of bleeding hydraulic brake and clutch systems.

Features:

- Same as MV6838

Includes:

- Same as MV6838 except includes clamp-on style auto-refill kit (MVA6832) instead of Master Auto-refill Kit (MVA6836)

Specifications

Bleeder Reservoir Capacity:	1.9 quarts (1.8 liters)
Refill Reservoir Capacity:	40 oz (1.2 liters)
Working Pressure:	60 – 150 psi (4.1 – 10.3 bar)
Vacuum @ 90 psi (6.2 bar):	26 in. Hg (88 kPa)
Air Consumption @ 90 psi (6.2 bar):	4.3 cfm (2.0 l/s)
Flow Rate @ 60 psi (4.1 bar):	50 oz/min (1460 ml/min)
@ 90 psi (6.2 bar):	70 oz/min (2100 ml/min)
@ 150 psi (10.3 bar):	70 oz/min (2100 ml/min)
Inlet Thread Size:	¼" NPT
Packaged Weight:	5.1 lbs (2.3 kg)
Packaged Size:	11.5" wide x 10.8" tall x 8.8" deep (290 mm wide x 275 mm tall x 225 mm deep)



MV6838



MV6835

See pages 5 – 7 for our line of Hand Vacuum Pump Brake Bleeding Kits

Brake & Clutch Bleeding Equipment

MV6830 Vacuum Brake Bleeder

The compressed-air-operated MV6830 offers professional-grade brake and clutch bleeding performance. This compact yet powerful unit bleeds up to 2 quarts (1.9 liters) per minute, and its simple operation allows clean, quick bleeding of brake and clutch lines. Kit includes an advanced selection of accessories that ensure maximum convenience and performance for greater productivity.

Features:

- Compressed air operation
- Integrated 1.9 quart (1.8 liter) capacity fluid collection reservoir
- Variable control thumb throttle
- Swivel air inlet with quick-disconnect
- Quick-disconnect coupler for accessories
- Quiet, muffled exhaust
- Automatic overflow prevention

Includes:

- Brake bleeder
- 6' (1.8 m) bleed hose assembly
- 4' (1.2 m) fluid evacuation hose
- Molded base with screws for bench mounting
- Automatic fluid refill kit
- Hanging hook
- 3 Universal bleed screw adapters
- User manual (English/French/Spanish/German)

Specifications:

Reservoir Capacity:	1.9 quarts (1.8 liters)
Working Pressure:	60 - 150 psi (4.1 - 10.3 bar)
Vacuum @ 90 psi (6.2 bar):	26 in. Hg (88 kPa)
Air Consumption @ 90 psi (6.2 bar):	4.3 cfm (2.0 l/s)
Flow Rate @ 60 psi (4.1 bar):	50 oz/min (1460 ml/min)
@ 90 psi (6.2 bar):	70 oz/min (2100 ml/min)
@ 150 psi (10.3 bar):	70 oz/min (2100 ml/min)
Inlet Thread Size:	1/4" NPT
Packaged Weight:	5.0 lbs (2.3 kg)
Size:	9" tall x 6.5" dia. (230 mm tall x 150 mm dia.)



MV6830

MVA6836 Master Auto-refill Kit

Whether you're vacuum or manually bleeding/flushing a hydraulic brake or clutch system, if the master cylinder runs dry, air will be sucked into the system and the bleed process must be repeated. Mityvac model MVA6836 eliminates this problem by automatically maintaining an adequate level of new brake fluid in the master cylinder. It combines our MVA6832 gravity feed system with our MVA6834 vacuum plate system, to provide the most convenient, comprehensive auto-refill system available.

Features:

- Includes clamp-on and plate-style refill components to fit all styles of master cylinders including dual chamber
- Large 40 oz (1.2 l) reservoir holds enough fluid for an entire flush
- On/Off valve controls the flow of fluid from the reservoir
- Adjustable fluid level control maintains the correct level of fluid in the master cylinder
- Conveniently adapts for use with standard 12 oz (355 ml) and 32 oz (946 ml) brake fluid bottles

Includes:

- Clamp-on, gravity feed refill kit (MVA6832)
- 40 oz (1.2 l) fluid reservoir with transfer and storage lid
- Base with screw clamp
- Transfer tube with valve
- Level adjustment spring
- 12 oz (355 ml) and 32 oz (946 ml) bottle adapters
- Plate-style Auto-refill Upgrade Kit (MVA6834)
- Rectangular dual chamber refill plate
- Round refill plate
- Adjustable length rubber cords
- Fluid transfer tubes with connectors
- Reservoir hanging hook
- User manual (English/French/Spanish/German)

Specifications:

Reservoir Capacity:	40 oz (1.2 l)
Packaged Weight:	1.82 lbs (0.83 kg)
Packaged Size:	8.5" wide x 5.5" tall x 8.5" deep (215 mm wide x 140 mm tall x 215 mm deep)



MVA6836

Brake & Clutch Bleeding Equipment



MVA6832

MVA6832 Clamp-on Auto-refill Kit

MVA6832 uses gravity to automatically refill the master cylinder during vacuum or manual hydraulic brake or clutch bleeding/flushing. It includes a 40 oz (1.2 l) reservoir that mounts on top of the master cylinder and clamps securely to the wall. As old brake fluid is bled from the hydraulic system through the bleed screws, new fluid flows automatically from the reservoir to replenish the master cylinder.

Features:

- Large 40 oz (1.2 l) reservoir holds enough fluid for an entire flush
- On/Off valve controls the flow of fluid from the reservoir
- Fluid level control maintains the correct level of fluid in the master cylinder
- Conveniently adapts for use with standard 12 oz (355 ml) and 32 oz (946 ml) brake fluid bottles
- Universal top-mount design fits most types of master cylinders

Includes:

- 40 oz (1.2 l) fluid reservoir with transfer and storage lid
- Base with screw clamp
- Transfer tube with valve
- Level adjustment spring
- 12 oz (355 ml) bottle adapter
- 32 oz (946 ml) bottle adapter
- User manual (English/French/Spanish/German)

Specifications:

Reservoir Capacity:	40 oz (1.2 l)
Packaged Weight:	13.4 oz (0.38 kg)
Packaged Size:	6.5" wide x 5" tall x 6.3" deep (165 mm wide x 125 mm tall x 160 mm deep)



MVA6834

MVA6834 Plate-style Auto-refill Upgrade Kit

Upgrade your MVA6832 Clamp-on Auto-refill Kit with MVA6834, to create our MVA6836 Master Auto-refill Kit. The plates included with MVA6834 significantly expand the number of applications to include dual chamber and small neck master cylinders, as well as low clearance applications.

Features:

- Extends applications of MVA6832 Clamp-on Auto-refill Kit to include dual chamber and small neck master cylinders
- Refills master cylinder automatically using vacuum produced while brake bleeding
- Utilizes 40 oz (1.2 l) reservoir included with MVA6832 for bulk dispensing and multiple brake jobs
- Adapts for use with standard 12 oz (355 ml) and 32 oz (946 ml) bottles of brake fluid
- Plates are manufactured from durable composite material with foam underside to ensure an airtight seal with master cylinder
- Round and rectangular plates fit virtually every master cylinder

Includes:

- Rectangular dual chamber refill plate
- Round refill plate
- Adjustable length rubber cords
- Fluid transfer tubes with connectors
- Reservoir hanging hook
- User manual (English/French/Spanish/German)

Specifications:

Packaged Weight:	1.10 lbs (0.50 kg)
Packaged Size:	8.5" wide x 7.0" tall x 4.5" deep (215 mm wide x 180 mm tall x 115 mm deep)

Brake & Clutch Bleeding Equipment

07220 Pressure Bleeder

The manually-operated 07220 allows pressure bleeding old fluid and trapped air from brake and other hydraulic systems without the need for expensive adapters. Also ideal for filling differentials, transfer cases, transmissions, gearboxes and more.

Features:

- Manual pump operation requires no shop air or electricity
- Integrated 2 quart (1.9 liter) capacity dispensing reservoir
- Universal application eliminates the need for special adapters
- Trigger operation with fluid flow control
- Large, wide neck for easy fill

Includes:

- Pressure bleeder with integrated dispensing reservoir
- 16 oz (475 ml) collection reservoir with fluid transfer and storage lids
- Flex-wand with universal pressure bleeding and flushing adapter
- 36" (915 mm) polyethylene discharge hose
- 1/4" (6 mm) ID x 2.5" (65 mm), 4" (100 mm), 6" (150 mm), and 24" (610 mm) clear tubing
- 5/32" (4 mm) ID x 3" (75 mm) clear tubing
- 1/4" (6 mm) ID x 5/32" (4 mm) ID in-line reducer
- 3 Tapered adapters
- 3 Bleed screw snap-over adapters
- User manual (English/French/Spanish)

Specifications:

Capacity of Dispensing Reservoir:	2 quarts (1.9 liters)
Capacity of Collection Reservoir:	16 oz (475 ml)
Packaged Weight:	2.1 lbs (1.0 kg)
Packaged Size:	5.2" deep x 8.0" wide x 12.1" tall (130 mm deep x 205 mm wide x 305 mm tall)



07220

Engine Diagnostic Equipment

Engine Diagnostic Equipment

Mityvac has long been an industry leader in vacuum related engine performance and diagnostic test equipment. In addition to the original Mityvac automotive vacuum test kits, we offer an outstanding selection of cylinder compression and fuel system pressure test kits to meet the needs of professional service technicians worldwide.

MV5532 Digital Compression Test Kit

This comprehensive gasoline engine compression test kit features an electronic tester that memorizes the peak compression value for each cylinder. When testing is complete, the values can be quickly reviewed at the push of a button. Everything is included to perform wet and dry compression tests commonly used to detect ring or cylinder head problems, sticking valves, blown head gasket(s) and more. Includes adapters for use on motorcycles and marine and small engines, and an air-hold adapter for performing valve seal repairs without removing the cylinder head(s). Not for use on diesel engines.

Features:

- Stores maximum compression value for up to 12 cylinders
- Backlit LC display is easy to read from any angle and in any light
- Uses standard 9V battery for convenience and cost
- Automatically shuts off after 3 minutes of non-use (memory is retained)
- Rubber boot protects the gauge from bumps and drops
- Sealed, grease- and oil-resistant gauge face prevents contamination of electronics
- Displays values in PSI, Bar and kPa

Includes:

- Digital compression tester comprising of test gauge with rubber boot, 10" (250 mm) high-pressure hose and female quick-change coupler
- 14 mm standard reach thread x 6.5" (165 mm) hose adapter
- 14 mm standard reach thread x 12" (305 mm) hose adapter
- 14 mm reach thread x 12" (305 mm) hose adapter
- 18 mm standard reach thread x 12" (305 mm) hose adapter
- 18 mm reach male thread x 14 mm standard reach female thread plug adapter
- 16 mm male thread x 14 mm standard reach female thread plug adapter
- 10 mm male thread x 14 mm standard reach female thread plug adapter
- 12 mm male thread x 14 mm standard reach female thread plug adapter
- Air hold adapter
- Field service kit
- Custom-molded case
- User manual (English/French/Spanish/German)

Specifications:

Maximum Pressure:	300 psi (2070 kPa) (20.7 bar)
Packaged Weight:	4.9 lbs (2.21 kg)
Case Size:	15.7" wide x 12.4" tall x 3.2" deep 400 mm wide x 315 mm tall x 82 mm deep

Gas Compression Test Adapters

MVA5501

10 mm male thread x 14 mm standard reach female thread

MVA5502

12 mm male thread x 14 mm standard reach female thread

MVA5503

18 mm long reach male thread x 14 mm standard reach female thread

MVA5504

14 mm standard reach thread x 12" (305 mm)

MVA5506

14 mm long reach thread x 12" (305 mm)

MVA5507

16 mm male thread for Ford Triton engines x 14 mm standard reach female thread

MVA5508

14 mm standard reach thread x 6.5" (165 mm)

MVA5509

18 mm standard reach thread x 12" (305 mm)

MVA5510

Air Hold Adapter



MV5532



MVA5501



MVA5507



MVA5502



MVA5508



MVA5503



MVA5504



MVA5509



MVA5506



MVA5510

See pages 5 – 6 for our line of Hand Vacuum Pump Automotive Test Kits

Engine Diagnostic Equipment

05530 Compression Test Kit

This comprehensive kit includes everything required to perform dry and wet engine cylinder compression tests commonly used to detect ring or cylinder head problems, sticking valves, blown head gasket(s) and more. Includes adapters for use on motorcycles, marine and small engines and an air-hold adapter for performing valve seal repairs without removing the cylinder head(s). Not for use on diesel engines.

Features:

- Manual pressure release for maintaining peak readings
- Professional-grade threaded adapters for leak-proof seals
- Extended hoses for hard-to-reach applications
- Large, easy-to-read 2³/₄" (70 mm) diameter gauge
- Adapters to fit engines as small as lawn mowers, chain saws and trimmers
- Quick-disconnect coupler for easy accessory changes

Includes:

- 2³/₄" (70 mm) gauge with high impact lens, rubber boot, and four (4) scales of measure (psi, kg/cm², bar, kPa), attached to 10" (250 mm) hose and quick release coupler
- 14 mm short-thread adapter with 6¹/₂" (165 mm) and 12" (305 mm) hoses
- 14 mm long-thread adapter with 12" (305 mm) hose
- 18 mm short-thread adapter with 12" (305 mm) hose
- 14 mm short-thread x 18 mm long-thread adapter
- 10 mm thread small engine adapter
- 12 mm thread small engine adapter
- Quick-release air hold adapter
- Custom blow-molded case
- Field service kit
- User manual (English/Spanish/French)

Specifications:

Packaged Weight:	3.5 lbs (1.6 kg)
Packaged Size:	14.5" wide x 8" tall x 2.7" deep (370 mm wide x 205 mm tall x 70 mm deep)
Max. Pressure:	300 psi (21kg/cm ²) (20.5 bar) (2,070 kPa)



05530

05520 Compression Test Kit

Designed for dry and wet automotive cylinder compression testing to detect ring or cylinder head problems, sticking valves, blown head gasket(s) and more. Pressure gauge has a large easy-to-read face, and includes hose and adapters for testing engines with 14 mm and 18 mm short thread and 14 mm long thread spark plugs. Not for use on diesel engines.

Features:

- Manual pressure release for maintaining peak readings
- Large easy-to-read gauge face with multi-colored scales
- Professional-grade threaded adapters for leak proof seals
- Quick-disconnect coupler speeds up cylinder changes

Includes:

- 2³/₄" (70 mm) diameter Bourdon tube gauge (readings indicated in four (4) scales of measure (bar, psi, kPa, and kg/cm²) with pressure release and quick-change coupler.
- 14 mm and 18 mm short-thread adapter with 15" (380 mm) hose
- 14 mm long-thread adapter
- User manual (English/Spanish/French)

Specifications:

Packaged Weight:	1.0 lb (0.45 kg)
Size:	5" wide x 12" tall x 1 ³ / ₈ " deep (125 mm wide x 305 mm tall x 35 mm deep)
Max. Pressure:	300 psi (21 kg/cm ²) (20.5 bar) (2,070 kPa)



05520

Engine Diagnostic Equipment



05525

05525 Compression Tester

This quick-test style tester does not require threading into the spark plug hole, making it an ideal, economic solution for quickly diagnosing engine compression problems such as worn piston rings, sticking or burnt valves, blown head gasket(s) or carbon build-up in cylinders, on cars and small engines. Not for use on diesel engines.

Features:

- Large easy-to-read pressure gauge
- Universal rubber adapter fits virtually any size spark plug hole
- Manual release valve holds peak pressure readings for easy recording
- Small compact unit fits conveniently into tool box

Includes:

- 2³/₄" (70 mm) diameter Bourdon tube gauge (readings indicated in four (4) scales of measure: bar, psi, kPa, and kg/cm²) with pressure release, quick-change coupler and stem with universal rubber spark plug hole adapter and manual release pressure valve
- User manual (English/Spanish/French)

Specifications:

Packaged Weight:	6.7 oz (190 g)
Size:	6" tall x 2 ³ / ₄ " dia. (150 mm tall x 70 mm dia.) gauge
Max. Pressure:	300 psi (21kg/cm ²) (20.5 bar) (2,070 kPa)



05515



05515 Fuel Injection Pressure Test Kit

An essential tool for diagnosing many fuel injection problems including leaking or clogged injectors, fuel rail deterioration, clogged fuel filter and fuel pump malfunction. Kit includes adapters for GM, Ford, Chrysler, Jeep and Eagle multi-port fuel injection systems with fuel rail test ports.

Features:

- Large, easy-to-read gauge with 0 - 100 psi (0 - 700 kPa) scale
- Manual pressure release
- High-pressure braided hose with solid brass fittings

Includes:

- 2³/₄" (70 mm) diameter Bourdon tube gauge (readings indicated in psi and kPa) with manual pressure release, 15' (380 mm) braided hose and GM/Chrysler adapter
- Ford adapter
- 6' (1.8 m) fuel drain hose
- User manual (English/Spanish/French)

Specifications:

Packaged Weight:	1.0 lb (0.45 kg)
Packaged Size:	5" wide x 12" tall x 1 ³ / ₈ " deep (125 mm wide x 305 mm tall x 35 mm deep)
Max. Pressure:	100 psi (700 kPa)

05511 Vacuum/Pressure Gauge and Fuel Pump Tester

Designed for performing pressure and vacuum tests on mechanical and electrical fuel pumps (up to 10 psi), this valuable instrument can also diagnose a wide variety of engine problems including improper valve timing, burned, chipped or stuck valves, sticking choke, leaking manifold, improper fuel mixture and more. The detailed gauge face illustrates normal and abnormal ranges of vacuum, and provides input for diagnosing common malfunctions.

Features:

- Large 3¹/₂" (90 mm) diameter gauge indicates both pressure and vacuum
- Gauge face illustrates normal and abnormal operating ranges, and provides input for diagnosing common malfunctions
- Includes instructions for testing and diagnosing fourteen (14) critical engine and fuel pump functions

Includes:

- 3¹/₂" (90 mm) compound gauge (readings indicated in psi, kg/cm², in. Mercury (Hg), and cm Mercury (Hg)) with barb fitting
- 24" (610 mm) oil-resistant hose
- Universal fuel line adapter
- Tapered adapter
- Tee adapter
- User manual (English/Spanish/French)

05511



Specifications:

Packaged Weight:	12.3 oz (350 g)
Packaged Size:	5" wide x 12" tall x 1 ³ / ₈ " deep (125 mm wide x 305 mm tall x 35 mm deep)
Max. Pressure:	10 psi (0.7 kg/cm ²)
Max. Vacuum:	28 in. Hg (70 cm Hg)

See pages 5 – 6 for our line of Hand Vacuum Pump Automotive Test Kits

Engine Diagnostic Equipment

MV5535 Digital Diesel Compression Test Kit

This comprehensive diesel engine compression test kit features an electronic tester that memorizes the peak compression value for each cylinder. When testing is complete, the values can be quickly reviewed at the push of a button. The kit also includes two (2) injector adapters and four (4) glow plug adapters for testing most modern diesel cars and light trucks sold in the United States.

Features:

- Stores maximum compression value for up to 12 cylinders
- Backlit LC display is easy to read from any angle and in any light
- Uses standard 9V battery for convenience and cost
- Automatically shuts off after 3 minutes of non-use (memory is retained)
- Rubber boot protects the gauge from bumps and drops
- Sealed, grease- and oil-resistant gauge face prevents contamination of electronics
- Displays values in PSI, Bar and kPa

Includes:

- Digital compression tester comprising of test gauge with rubber boot, 15" (380 mm) long, high-pressure hose, quick-change coupler
- Injector Adapter (Dodge 24V 5.9L Cummins (1999-2003), 5.9L Cummins ISB and ISBE)
- Injector Adapter (Case/Cummins Series "B" 2.9L, 3.9L, 5.9L through 1998)
- Glow Plug Adapter (GM 4.3L, 5.7L (1978-1985), Navistar 6.9L, 7.3L through 1994)
- Glow Plug Adapter (GM 6.2L, 6.5L V8)
- Glow Plug Adapter (Ford/Navistar 7.3L Power Stroke (1994-2003))
- Glow Plug Adapter (Volkswagen 1.9L TDI)
- Right-angle Adapter
- Field service kit
- Custom-molded case
- User manual (English/French/Spanish/German)

Specifications:

Maximum Pressure:	1,000 psi (6890 kPa) (68.9 bar)
Packaged Weight:	5.2 lbs (2.36 kg)
Case Size:	15.7" wide x 12.4" tall x 3.2" deep (400 mm wide x 315 mm tall x 82 mm deep)



MV5535

MV5536 Digital Diesel Compression Tester

The Mityvac MV5536 electronic diesel compression tester memorizes the peak compression value for up to 12 cylinders. After testing, the values can be quickly reviewed at the push of a button. Capable of testing compression up to 1,000 psi (6890 kPa) (68.9 bar). The tester features a backlit LC display that is easy to read in any light. Its oil- and grease-resistant gauge face and rubber boot make it durable, and the custom case has room for storing adapters.

Features:

- Stores maximum compression value for up to 12 cylinders
- Backlit LC display is easy to read from any angle and in any light
- Uses standard 9V battery for convenience and cost
- Automatically shuts off after 3 minutes of non-use (memory is retained)
- Rubber boot protects the gauge from bumps and drops
- Sealed, grease- and oil-resistant gauge face prevents contamination of electronics
- Displays values in PSI, Bar and kPa

Includes:

- Digital compression tester comprising of test gauge with rubber boot, 15" (380 mm), high-pressure hose and quick-change coupler
- Custom-molded case
- User manual (English/French/Spanish/German)

Specifications:

Maximum Pressure:	1,000 psi (6890 kPa) (68.9 bar)
Packaged Weight:	2.5 lbs (1.11 kg)
Case Size:	12.5" wide x 8.4" tall x 3.8" deep (315 mm wide x 210 mm tall x 95 mm deep)



MV5536

See page 19 for diesel adapters sold separately

Engine Diagnostic Equipment



MV5534

MV5534 Analog Diesel Compression Tester

The Mityvac MV5534 diesel compression tester features an accurate glycerin-filled gauge capable of testing cylinder compression up to 1,000 psi (6890 kPa) (68.9 bar). It has a long 15" (380 mm) high-pressure hose with a quick-change coupler for getting into extremely tight areas. It also features a push-button pressure relief valve for running consecutive tests without disconnecting the gauge. The tester comes in a custom-molded case with extra storage space for adapters.

Features:

- Heavy-duty gauge is glycerin filled to dampen needle bounce
- Push-button pressure relief allows repeated tests without disconnecting the tester
- Quick-change coupler is convenient for getting into tight spaces
- Rubber boot protects the gauge from bumps and drops
- Units of measure include PSI, kg/cm² and Bar
- Includes custom-molded case with extra space for adapters

Includes:

- Compression tester comprising of glycerin-filled test gauge with rubber boot, 15" long (380 mm long) high-pressure hose and quick-change coupler
- Custom-molded case
- User manual (English/French/Spanish/German)

Specifications:

Maximum Pressure:	1,000 psi (6890 kPa) (68.9 bar)
Packaged Weight:	2.5 lbs (1.14 kg)
Case Size:	12.5" wide x 8.4" tall x 3.8" deep (315 mm wide x 210 mm tall x 95 mm deep)


See page 19 for diesel adapters sold separately

Engine Diagnostic Equipment

Diesel Compression Test Adapters

Diesel engines utilize a fuel injector on each cylinder to inject fuel for combustion. Although they do not use spark plugs to ignite the fuel, most utilize glow plugs to aid cold starts. In order to access the compression within a cylinder, an adapter is required which replaces either the injector or the glow plug. Mityvac offers injector and glow plug adapters to facilitate testing of most diesel engines in use in cars and light trucks, industry, construction, marine and agriculture. In addition we offer MotoMeter™ and Snap-on™ adapters that allow the use of Mityvac testers with these brands of test adapters. All Mityvac adapters are designed for use with our digital or analog compression testers.

Manufacturer	Adapter No	Model/Engine
Allis-Chalmers	MVA5620	6000, 7000, 10000, 11000
Audi	MVA5622	All U.S. models
BMW	MVA5613	2.4L
J.I. Case	MVA5619	70 Series, 188 & 207 cid w/ pencil-type injector
J.I. Case	MVA5620	70 & 90 series, 1570, 2470, 2480, 4890 engines w/ non-pencil-type injector
Caterpillar	MVA5619	1100 & 3208 series pencil-type injector
Caterpillar	MVA5616	D336, 1674, 1676, 3406, 3408, 3412
Chevrolet	MVA5614	1.8L, 2.2L LUV/Isuzu
Cummins/Case	MVA5602	B series, 2.9L, 3.9L, 5.9L
Cummins/Case	MVA5617	C series, 8.3L
Cummins/Case	MVA5623	NH855, V6, V8, V12, 903 V8, L10
Cummins	MVA5615	V-185, V-210, V-225, V-555, VT-255, VT-555
Cummins	MVA5622	6BT, 4.02" bore, 5.9L
Detroit Diesel	MVA5621	53, 71, 92, 110, 149, V53, V71
Deutz	MVA5613	Most models
Dodge	MVA5602	5.9L, 12V Cummins (1989-1998)
Dodge	MVA5601	5.9L, 24V Cummins (1998-2005)
Fiat Allis	MVA5620	8035-02-300, 8035-02-301, 8035-02-302, 8045-02, 8045-03
Fiat Allis	MVA5620	Tractor engines
Ford	MVA5612	Escort, Lynx, Tempo, Topaz (1984-85)
Ford	MVA5603	Navistar 6.9L & 7.3L through 1994
Ford	MVA5605	Navistar 7.3L Power Stroke
Ford/Mazda	MVA5612	2.0L & 2.2L Ford products including Ranger
Ford/Mazda	MVA5603	4.3L & 5.7L (1978-85)
GM	MVA5604	6.2L & 6.5L V8
GM	MVA5613	W4, W7, W7HV (GMC Trucks)
GM	MVA5611	Duromax 6600
IHC	MVA5620	D361, DT361 D429, DT429, DV462, DV550, DVT550, DT573, DV573, DVT573, 361, 407
IHC	MVA5614	1.8L, 2.2L
Isuzu	MVA5611	6.6L
Isuzu	MVA5612	NPR, KS, NGR (Trucks)
John Deere	MVA5619	Pencil Injector—Early 300, 400, 500 Series & 276, 404, 531 CID engines
John Deere	MVA5620	404, 466, 453, 619
Kubota	MVA5612	Some models
Lincoln	MVA5613	2.4L Mark VII, Continental (1984-85)
Lincoln	MVA5612	Mark VII, Continental w/ Volvo engines
Mack	MVA5620	END 405, 457, 475, 510, 605, 672, 673, 674, 711, 864 & ENDT 673, 675, 676, 865, 866
Mercedes	MVA5622	Cars & trucks w/ 24 mm ports
Mercedes	MVA5613	250, 300, 300 Turbo, 350 Turbo
Mitsubishi	MVA5612	2 & 3 cylinder engines, some Fuso
Navistar	MVA5618	DT360, DT466, 9.0L, 312, 360, 414, 436, & 446 cid up to 1997
Nissan	MVA5612	2.2L & Medium UD truck
Onan	MVA5620	DSL, MDL
Perkins	MVA5620	4.203, 4.236, 4.248, 6.354, 8.540
Peugeot	MVA5613	2.3L & 2.5L (1978-86)
Scania	MVA5620	DN11, DS11
Toyota	MVA5614	1.8L
Toyota	MVA5612	2.2L
Toyota	MVA5622	All except 1.6L & 1.9L TDI
Volkswagen	MVA5606	1.6L
Volkswagen	MVA5613	1.9L TDI
Waukesha	MVA5619	D155D
Waukesha	MVA5620	180DLC, 190D, 195D, 197D
White Farm	MVA5620	66, 77, 88, 99, 166, 177, 188, 199, 550, 660, 770, 880, 950, 1550, 1555, 1600, 1650, 16555, 1750, 17555, 1800, D2000, 2300, 3000
Wisconsin	MVA5620	340, 350, 430, 660, 670, 750, 860, 1000

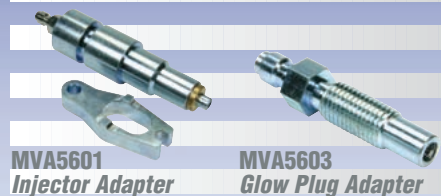

MVA5601
Injector Adapter

MVA5603
Glow Plug Adapter



MVA5623
Injector Adapter

MVA5604
Glow Plug Adapter



MVA5622
Injector Adapter

MVA5614
Glow Plug Adapter



MVA5621
Injector Adapter

MVA5613
Glow Plug Adapter



MVA5612
Glow Plug Adapter



MVA5620
Injector Adapter

MVA5611
Glow Plug Adapter




MVA5619
Injector Adapter

MVA5605
Glow Plug Adapter



MVA5618
Injector Adapter

MVA5606
Glow Plug Adapter



MVA5602
Injector Adapter

MVA5609
MotoMeter™ Adapter



MVA5617
Injector Adapter

MVA5608
Snap-on™ Adapter



MVA5616
Injector Adapter

MVA5607
Right Angle Adapter

Cooling System Equipment

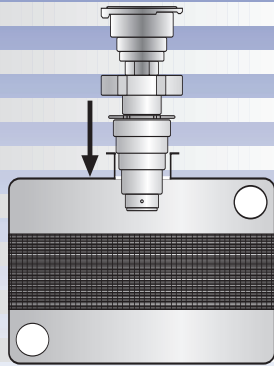


Fig. 1

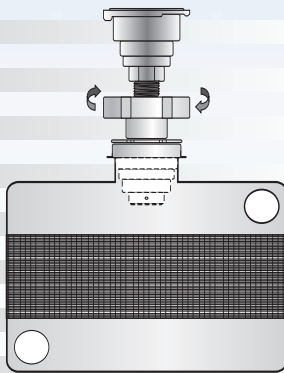


Fig. 2

Cooling System Test & Evacuation Equipment

All Mityvac cooling system test, evacuation and refill equipment utilize our specially designed universal cooling system adapter that conveniently adapts to a wide variety of cars, trucks and SUVs. Capable of replacing numerous specialized radiator and expansion tank adapters, our flexible stepped design provides the most economical, efficient means for performing routine testing and maintenance on automotive cooling systems.

Application of the Universal Cooling System Adapter

The Mityvac Universal Cooling System Adapter utilizes a multi-step, expandable rubber bushing design to adapt to the radiator and expansion tank filler necks on most domestic and import automobiles. Each of the five steps on the bushing has a unique diameter ranging from 3/4" (20 mm) up to 1 1/2" (40 mm). The diameters are designed slightly smaller than the most common filler neck sizes so that the adapter easily installs into the filler neck until the largest possible diameter fits with only slight interference (Fig. 1). The tension knob is then rotated causing the bushing to expand and securing the adapter in the neck (Fig. 2). Once properly installed, the adapter forms an airtight seal with the radiator or expansion tank, and can be utilized for vacuum, pressure or temperature related diagnostics as well as evacuating and refilling coolants while eliminating airlocks.

The Mityvac Universal Cooling System Adapter will not fit every automotive radiator and expansion tank available. However, it can be used in conjunction with many specialized adapters. If the sole intended use of the universal adapter is for a specific or unique application, please verify the size and depth of the application to ensure proper fit.

04700 AirEvac Cooling System Vacuum Purge & Refill Kit

New, sleeker automotive designs often place the radiator below the engine, creating the potential for air to become trapped in the engine block or cylinder head(s) causing the engine to overheat. The Mityvac AirEvac Kit combines our universal cooling system adapter with a compressed-air-operated venturi vacuum to quickly eliminate trapped air by purging and refilling the cooling system under vacuum. Equipped with a flow control valve, our unique design allows the operator to vacuum purge the cooling system, hold the vacuum in order to monitor the cooling system for leaks and then refill it using the same vacuum.



04700

Features:

- Universal design fits most automotive radiators and expansion tanks
- Flow control valve for maintaining system vacuum
- Muffled, venturi-style vacuum for quiet operation
- Professional-grade diaphragm gauge with protective rubber boot
- Durable brass and aluminum construction

Includes:

- Universal cooling system adapter with:
 - Diaphragm gauge with rubber boot protector, 0 - 30 inches Hg (0 - 100 kPa) vacuum
 - Brass flow control valve
 - Quick-connect coupler
- Venturi-style vacuum generator with muffler
- Coolant refill hose with inlet screen
- 3-piece rubber adapter kit for micro-neck and x-large neck applications
- Blow-molded case
- User manual (English/French/Spanish)

Specifications:

Packaged Weight:	3.2 lbs (1.6 kg)
Packaged Size:	12" x 8" x 3 3/8" (305 mm x 203 mm x 85 mm)
Vacuum:	15 in. Hg (51 kPa) @ 60 psi (4.1 bar) inlet pressure 24 in. Hg (81 kPa) @ 90 psi (6.2 bar) inlet pressure 25 in. Hg (85 kPa) @ 120 psi (8.3 bar) inlet pressure
Air Inlet Size:	1/4" NPT

Cooling System Equipment

04520 Universal Cooling System Pressure Test Kit

Utilizing the Mityvac Universal Cooling System Adapter and a hand pressure pump, this kit is ideal for diagnosing a wide variety of cooling system-related functions. Its unique design allows simultaneous monitoring of temperature and pressure crucial for accurately detecting and/or troubleshooting: damaged head(s) or block, blown head gasket(s), thermostat operation, electric fan system functions, leaking radiators, reservoirs and hoses.

Features:

- Universal design fits most automotive radiators and expansion tanks
- Performs simultaneous monitoring of pressure and temperature
- Color-coded gauge for easy reading and diagnosis
- Automatic pressure-relief valve
- Compatible for use with specialized radiator and pressure cap testing adapters

Includes:

- Universal cooling system adapter with brass shuttle valve and pressure hose assembly with quick-connect
- Repairable hand-held pressure pump with 0 - 30 psi (0 - 200 kPa) gauge, rubber boot protectors and quick-connect coupler
- Temperature probe (Fahrenheit/Celsius)
- Custom-fit blow-molded case
- User manual (English/French/Spanish)

Specifications:

Packaged Weight:	2.9 lbs (1.3 kg)
Packaged Size:	12" x 8" x 3 ³ / ₈ " (305 mm x 205 mm x 85 mm)
Max. Pressure:	30 psi (200 kPa)
Max. Temperature:	400°F (200°C)



04520

04505 Universal Cooling System Adapter

Expand the versatility of standard cooling system pressure testers by adding the Mityvac 04505 Universal Adapter to your toolbox. This adapter replaces dozens of special, custom-manufactured radiator and expansion tank adapters required by other brands of pressure testers, saving you time, money and space. Simply attach the radiator adapter from your standard kit to the inlet side of our universal adapter to create a pressure tester compatible with the majority of cars, trucks and SUVs. The 04505 is easy to service and requires no inflation or conditioning.

Features:

- Universal design fits most automotive radiators and expansion tanks
- Inlet fits standard adapter available on all brands of pressure testers
- Simple, easy-to-service design requires no complicated setup

Includes:

- Universal cooling system adapter
- User manual (English/French/Spanish)

Specifications:

Weight:	11 oz (310 g)
Size:	5 ¹ / ₄ " tall x 2 ¹ / ₂ " diameter (135 mm tall x 65 mm diameter)



04505

Specialty Tools and Equipment

Specialty Tools and Equipment

Mityvac offers a selection of specialty tools and equipment designed for those unique applications where just the right product can greatly simplify an application or job.

07240 Fluid Transfer Pump

The Fluid Transfer Pump provides a clean, quick, no-hassle method of transferring or evacuating virtually any non-volatile fluid including engine oil, coolants, transmission fluid, brake fluid or power steering fluid. Use it to drain engine oil or transmission fluid directly through the dipstick tube. The pump is small and lightweight, so it fits easily in a toolbox or the trunk of a car, making it convenient to store where you use it the most. And it includes accessories required for fluid transfer/evacuation or inflation. Use it on cars, boats, motorcycles, ATVs, lawn & garden equipment, etc. It works great around the house too! Use it to inflate toys, water or air mattresses, sports balls or bicycle tires.

Features:

- Durable polyethylene construction—won't rust or corrode
- Hand-operated, lightweight and portable
- Siphons, evacuates and inflates

Includes:

- Hand pump with intake and discharge ports
- 2 Intake/discharge hoses
- 2 Intake/discharge hose connectors
- Inline reducer
- Air-pressure hose
- Dipstick hose
- Instruction manual

Specifications:

Packaged Weight:	1.2 lbs (0.5 kg)
Packaged Size:	10 ¹ / ₂ " x 9 ¹ / ₂ " x 2 ³ / ₄ " (265 mm x 240 mm x 70 mm)
Pump Size:	2" dia. x 9" long (50 mm dia. x 230 mm long)



07240



07605

07605 Hose Clamp

This tool works great for clamping flexible coolant, fuel, vacuum and brake lines or hoses up to 1/2" (13 mm) in diameter. It has a unique lever action design with adjustable lock for maintaining clamp force at virtually any diameter. The clamp is constructed of chrome-plated steel for years of use and has a molded comfort grip.

Specifications:

Weight:	9.5 oz (270 g)
Size:	1 ¹ / ₂ " x 6 ¹ / ₂ " x 1/4" (40 mm x 165 mm x 6.4 mm)

05910 Foam Mat

This large 12" x 20" (305 mm x 510 mm) cushioned kneeling pad is a super comfortable 1" (25 mm) thick. It is flame retardant and non-absorbent, making it ideal for any time you kneel at work or around the shop or home. It also works great as a stadium or boat seat cushion.

Specifications:

Weight:	10.6 oz (300 g)
Size:	12" x 20" x 1" (305 mm x 510 mm x 25 mm)



05910

Accessories

Hand Vacuum Pumps

Dual Pressure/Vacuum Converter Kits

Increase the versatility of any Mityvac Silverline or Selectline hand pump by adding a dual pressure/vacuum converter. Once installed, an operator can quickly switch between achieving vacuum or pressure at the front port simply by turning a knob on the side of the pump. Kits easily replace the front end of any Mityvac Silverline or Selectline pump and include a compound gauge for measuring pressure or vacuum depending on the selection.

Model No. 04095

Kit includes:

- Die-cast dual converter body with pressure/vacuum switch
- Compound gauge with 0-30 psi (0-200 kPa) pressure and 0-30 in. Hg (0-100 kPa) vacuum indications
- Pump conversion adapter
- Thumb pad
- Replacement duckbill valve
- Assembly screws
- O-ring seals
- Instruction manual

Specifications:

Weight:	7.7 oz (218 g)
Size:	2 ¹ / ₄ " x 2" x 4 ¹ / ₄ " (55 mm x 50 mm x 110 mm)



Model No. 06895

Kit includes:

- PVC dual converter body with pressure/vacuum switch
- Compound gauge with 0-30 psi (0-200 kPa) pressure and 0-30 in. Hg (0-100 kPa) vacuum indications
- (3) Adapters for conversion to various Mityvac pumps
- Thumb pad
- Replacement duckbill valve
- Assembly screws
- O-ring seals
- Instruction manual

Specifications:

Weight:	4.6 oz (130 g)
Size:	3" x 2" x 4" (75 mm x 50 mm x 100 mm)



06172 Quick-Change Vacuum Gauge

Durable, high-quality vacuum gauge with accurate diaphragm movement and protective rubber boot. Special stem design allows convenient 360° rotation of gauge and easy pin-release removal. Replaces original gauge on all Mityvac Silverline and Selectline hand pumps or additional option for pumps purchased without gauge. Includes bushing for adapting to threaded ports and locking pin. Indicates 0-30 inches of Mercury (0-100 kPa) vacuum.

Specifications:

Weight:	6.1 oz (173 g)
Size:	2 ³ / ₄ " x 1 ¹ / ₂ " x 3 ¹ / ₂ " (70 mm x 40 mm x 90 mm)



Accessories



06171

06171 Threaded Vacuum Gauge

Durable, high-quality gauge with accurate diaphragm movement. Gauge has threaded body for assembly into all Mityvac Silverline and Selectline hand pumps. For replacement of original gauge, or additional option for pumps purchased without gauge. Indicates 0-30 inches of Mercury (0-100 kPa) vacuum.

Specifications:

Weight:	3.3 oz (94 g)
Size:	2" x 1" x 2 ³ / ₄ " (50 mm x 25 mm x 70 mm)



06170

06170 Compound Vacuum/Pressure Gauge

Durable, high-quality compound vacuum/pressure gauge with accurate diaphragm movement. Replacement for Mityvac Silverline and Selectline dual vacuum/pressure pump gauge. Indicates 0-30 psi (0-200 kPa) pressure and 0-30 inches of Mercury (0-100 kPa) vacuum.

Specifications:

Weight:	4.4 oz (125 g)
Size:	2" x 1 ¹ / ₈ " x 2 ⁷ / ₈ " (50 mm x 29 mm x 73 mm)



MVA6000

MVA6000 Complete Automotive Accessory Kit

Kit contains accessories for testing and diagnosing dozens of engine performance and automotive mechanical functions and for one-person brake and hydraulic clutch bleeding. All components are designed for use with Mityvac Silverline and Selectline hand vacuum and dual pressure/vacuum hand pumps.

Includes:

- (4) Tapered adapters for connecting to tubing from .090" to .50" ID (2.3 mm to 12.7 mm ID)
- (2) Tapered manifold plugs
- (12) Color-coded vacuum line plugs
- (2) Universal bleed screw adapters for connecting to hydraulic bleed screws
- Automatic master cylinder refill kit
- 4.5 oz Reservoir bottle with fluid transfer and storage lid
- (2) 1/4" ID x 24" long (6.4 mm ID x 610 mm long) connection hoses
- User manual (English/French/Spanish/German)

Specifications:

Weight:	14.8 oz (420 g)
---------	-----------------



MVA6825

MVA6825 Master Cylinder Refill Kit

Eliminates the need to repeatedly top-off the brake master cylinder or clutch slave cylinder while vacuum bleeding. Fluid level is automatically maintained, preventing air from being reintroduced into brake and clutch lines. The kit adapts to standard 12 oz and 32 oz brake fluid bottles, eliminating the mess and hassle of transferring fluid into a reservoir and maintaining brake fluid integrity.

Kit includes:

- 12 oz Bottle adapter
- 32 oz Bottle adapter
- 3" (75 mm) diameter master cylinder plate
- 6" (150 mm) diameter master cylinder plate
- 4" x 8" (100 mm x 200 mm) dual chamber master cylinder plate
- Instruction sheet

Specifications:

Weight:	4.7 oz / 135 g
---------	----------------

Accessories

MVA6005 16 oz Fluid Reservoir Kit

Used with Mityvac hand vacuum/pressure pumps to collect or dispense larger volumes of fluid. Replaces smaller fluid reservoirs included with most vacuum kits, reducing the amount of time it takes to empty old fluid. A hook is included for conveniently securing the reservoir out of the way during use.

Kit includes:

- 16 oz (475 ml) capacity reservoir bottle
- Fluid transfer lid
- Fluid storage lid
- Removable hanging hook
- 1/4" ID x 6" long (6.4 mm ID x 150 mm long) fluid pick-up tube

Specifications:

Weight: 4.4 oz (125 g)



MVA6005

MVA6909 4.5 oz Fluid Reservoir Kit

Use in-line with Mityvac hand vacuum/pressure pumps to collect or dispense fluid. Replaces standard 4.5 oz reservoirs included with hand pump kits.

Kit includes:

- 4.5 oz (135 ml) capacity reservoir bottle
- Fluid transfer lid
- Fluid storage lid
- 1/4" ID x 3 5/8" long (6.4 mm ID x 90 mm long) fluid pick-up tube

Specifications:

Weight: 2.3 oz (65 g)



MVA6909

MVA6002 Automotive Test Adapter Kit

Contains plugs, adapters and tubes for use with Mityvac hand vacuum/pressure pumps for testing and diagnosing dozens of vacuum and pressure related engine systems.

Kit includes:

- 1/4" ID x 1 1/2" long (6.4 mm ID x 40 mm long) connection tube
- 5/32" ID x 3" long (4 mm ID x 75 mm long) connection tube
- 1/4" ID x 3 5/8" long (6.4 mm ID x 90 mm long) connection tube
- Rubber cup adapter
- 5/32" ID x 1/4" ID (4 mm ID x 6.4 mm ID) tubing adapter
- (4) Tapered adapters for connecting to tubing from .090" to .50" ID (2.3 mm to 12.7 mm ID)
- (2) Tapered manifold plugs

Specifications:

Weight: 0.8 oz (23 g)



MVA6002

MVA6003 Universal Brake Bleed Adapters

Mityvac's Universal Brake Bleed Adapter is specially designed to fit snugly onto a wide range of brake and hydraulic clutch bleed screws. It forms an airtight seal, and maintains a firm grip on the screw nipple.

Kit includes:

- (2) Universal bleed screw adapters
- (2) Tapered bleed adapters
- Brass barbed adapter for connecting to 1/4" (6.4 mm) ID tubing


Specifications:

Weight: 0.7 oz (20 g)



MVA6003

Accessories

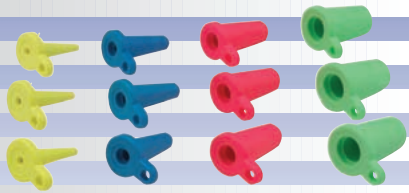

MVA6004

MVA6004 Vacuum Line Caps

Contains 12 rubber caps for plugging vacuum lines while performing in-line vacuum and pressure tests. Caps are color coded for easy line identification and tapered for plugging lines from $\frac{5}{32}$ "- $\frac{1}{2}$ " ID (4 mm-13 mm ID).

Specifications:

Weight: 1 oz (28 g)



06845

06845 Mason Jar Kit

Contains accessories for utilizing standard- and wide-mouth mason jars as fluid evacuation or pressure dispensing reservoirs. Works conveniently with Mityvac hand vacuum/pressure pumps.

Includes:

- $2\frac{1}{4}$ " (70 mm) diameter standard mason jar lid
- $3\frac{5}{16}$ " (84 mm) diameter wide-mouth mason jar lid
- (2) $\frac{1}{4}$ " ID x 48" long (6.4 mm ID x 1220 mm long) connection tubes
- Adapters for tubing sizes $\frac{1}{8}$ "- $\frac{1}{2}$ " OD (3.2 mm-13 mm OD) and $\frac{1}{4}$ "- $\frac{3}{8}$ " ID (6.4 mm-9.5 mm ID)

Specifications:

Weight: 6.6 oz (187 g)



MVA6001

MVA6001 Fluid Transfer Kit

Contains reservoir, adapters, tubing and other accessories for siphoning, transferring, extracting or dispensing fluids using a Mityvac hand vacuum/pressure pump.

Includes:

- 4.5 oz (135 ml) capacity reservoir bottle with fluid transfer and storage lids
- $\frac{1}{4}$ " ID x $1\frac{1}{2}$ " long (6.4 mm ID x 40 mm long) connection tube
- $\frac{5}{32}$ " ID x 3" long (4 mm ID x 75 mm long) connection tube
- (2) $\frac{1}{4}$ " ID x $\frac{3}{8}$ " long (6.4 mm ID x 90 mm long) fluid pick-up and connection tubes
- Rubber cupped adapter
- $\frac{5}{32}$ " ID x $\frac{1}{4}$ " ID (4 mm ID x 6.4 mm ID) tubing adapter
- (4) Tapered adapters for connecting to tubing from $.090$ " ID to $.50$ " ID (2.3 mm ID to 12.7 mm ID)
- (2) Tapered manifold plugs
- $2\frac{3}{4}$ " (70 mm) diameter mason jar lid
- $3\frac{5}{16}$ " (84 mm) diameter wide-mouth mason jar lid
- $\frac{1}{4}$ " ID x 48" long (6.4 mm ID x 1220 mm long) connection tube
- Adapters for tubing sizes $\frac{1}{8}$ "- $\frac{1}{2}$ " OD (3.2 mm-13 mm OD) and $\frac{1}{4}$ "- $\frac{3}{8}$ " ID (6.4 mm-9.5 mm ID)
- $\frac{3}{8}$ " ID x 48" long (9.5 mm ID x 1220 mm long) connection tube

Specifications:

Weight: 10.3 oz (292 g)



MVA6007

MVA6007 Dual Adapter Bleed Kit

This specially designed accessory attaches to Mityvac hand vacuum/pressure pumps and vacuum brake bleeding equipment for simultaneous bleeding of motorcycle dual caliper brake systems. Includes clear $\frac{1}{4}$ " ID (6.4 mm ID) hoses and two universal bleed adapters.

Specifications:

Weight: 7.6 oz (215 g)

Accessories

06485 Vacuum Pump Case

This custom blow-molded case fits Mityvac Silverline and Selectline (except Superpump) vacuum and dual converter pumps, and includes molded compartments for our 4.5 oz reservoir kit, master cylinder refill kit and user manual. Additional space is included for small adapters, plugs, line caps and connector hoses.

Specifications:

Weight:	1.3 lbs (0.59 kg)
Size:	12" x 8" x 3 ³ / ₈ " (305 mm x 205 mm x 85 mm)



06485

Fluid Evacuators

MVA6006 Extended Tube Kit

Extends the reach of Mityvac fluid evacuators models 07400, 07300 and 07201 by up to 6' (1.8 m). The kit contains a main evacuation tube, two smaller diameter tubes for extending into dipstick tubes and tube connectors. Each tube is 3' (0.9 m) longer than standard, making it convenient for evacuating fluids from taller vehicles such as SUVs and full size trucks.

Kit includes:

- 0.23" OD x 8' long (5.7 mm OD x 2.4 m long) dipstick tube with connector
- 0.26" OD x 8' long (6.6 mm OD x 2.4 m long) dipstick tube with connector
- 0.41" OD x 8' long (10 mm OD x 2.4 m long) main evacuation tube with connector

Specifications:

Weight:	12.8 oz (365 g)
Carton Size:	13" x 13" x 2" (330 mm x 330 mm x 50 mm)



MVA6006

07205 Brake Bleed Conversion Kit

The 07205 quickly connects to Mityvac models 07400, 07300 or 07201 fluid evacuators, converting them into one-person vacuum brake or hydraulic clutch bleeders. The kit contains a vacuum bleed tube with brass ball valve, universal bleed screw adapter and adapter for connecting to the evacuator.

Specifications:

Weight:	9.3 oz (265 g)
Size:	8" x 12" x 1 ¹ / ₂ " (150 mm x 305 mm x 65 mm)



07205



Numerical Index

Model	Page	Model	Page
MV5532.....	14	MVA5622.....	19
MV5534.....	18	MVA5623.....	19
MV5535.....	17	MVA6000.....	24
MV5536.....	17	MVA6001.....	26
MV6203.....	3, 4, 6	MVA6002.....	25
MV6206.....	4, 6	MVA6003.....	25
MV6210.....	3, 4	MVA6004.....	26
MV6212.....	3, 4, 7	MVA6005.....	25
MV6255.....	4	MVA6006.....	9, 27
MV6265.....	4	MVA6007.....	26
MV6815.....	7	MVA6825.....	24
MV6817.....	7	MVA6909.....	25
MV6830.....	10, 11	MVM5100.....	4
MV6832.....	10, 11, 12	04000.....	5
MV6834.....	11, 12	04010.....	2, 3, 4, 5
MV6836.....	10, 11, 12	04050.....	5
MV6838.....	10	04095.....	23
MV7430.....	8	04100.....	4
MVA5501.....	14	04505.....	21
MVA5502.....	14	04520.....	21
MVA5503.....	14	04555.....	3, 4, 5
MVA5504.....	14	04700.....	20
MVA5506.....	14	05505.....	20
MVA5507.....	14	05511.....	16
MVA5508.....	14	05515.....	16
MVA5509.....	14	05520.....	15
MVA5510.....	14	05525.....	16
MVA5601.....	19	05530.....	15
MVA5602.....	19	05910.....	22
MVA5603.....	19	06100.....	4
MVA5604.....	19	06170.....	24
MVA5605.....	19	06171.....	24
MVA5606.....	19	06172.....	23
MVA5607.....	19	06485.....	27
MVA5608.....	19	06820.....	6
MVA5609.....	19	06845.....	26
MVA5611.....	19	06895.....	23
MVA5612.....	19	07000.....	6
MVA5613.....	19	07201.....	9, 20
MVA5614.....	19	07205.....	8, 9, 27
MVA5615.....	19	07220.....	13
MVA5616.....	19	07240.....	22
MVA5617.....	19	07300.....	8, 20
MVA5618.....	19	07400.....	9, 20
MVA5619.....	19	07605.....	22
MVA5620.....	19	822405.....	4
MVA5621.....	19	823379.....	4

mityvac®

www.mityvac.com



LINCOLN®

Lincoln Industrial Corp.
One Lincoln Way
St. Louis, MO 63120-1578

Phone 314-679-4200
Fax 314-679-4359
www.lincolnindustrial.com

Form 442987 (12/05)
© Copyright 2005
Printed in U.S.A.